


DEV 3480 & DEV 3483 - MODULO Active Frames

DEV 3481 - MODULO Passive Frame

DEV 3490 - MODULO AC/DC Power Supply

DEV 3491 - MODULO DC/DC Power Supply

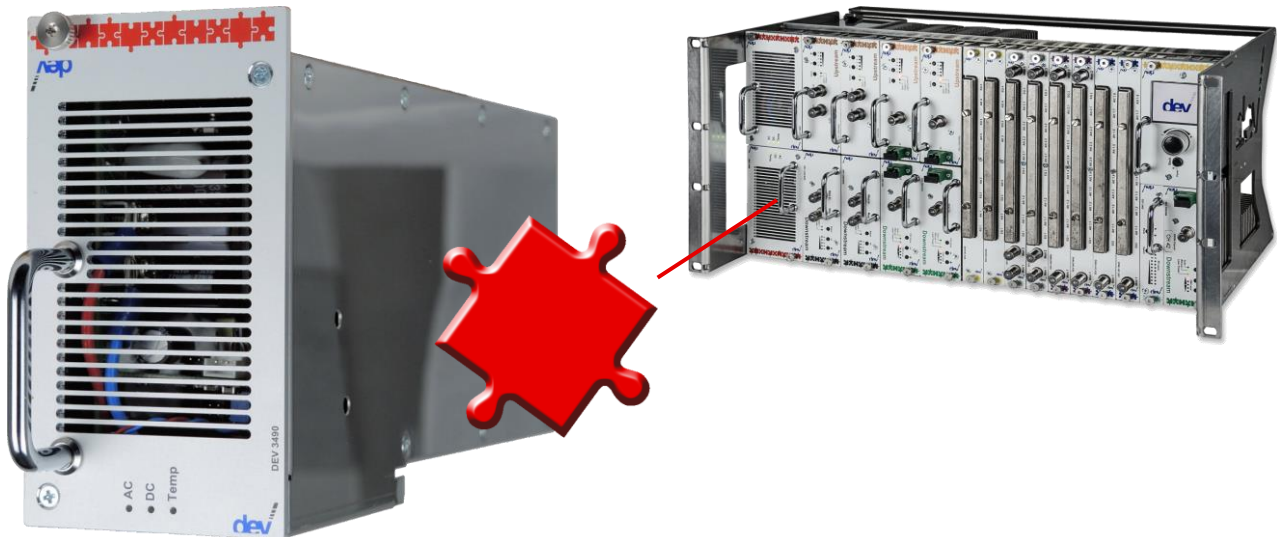


Features Active/Passive Frames:

- ▀ 3 RU (DEV 3483) or 5 RU (DEV 3480 & DEV 3481)
- ▀ Up to 8 active Modules + 2 Power Supplies (DEV 3483)
- ▀ Up to 18 active Modules + 2 Power Supplies (DEV 3480)
- ▀ Up to 22 1:8/8:1 Splitter/Combiner (DEV 3480 & DEV 3481)
- ▀ Up to 44 1:4/4:1 Splitter/Combiner (DEV 3480 & DEV 3481)
- ▀ Up to 66 1:2/2:1 Splitter/Combiner (DEV 3480 & DEV 3481)
- ▀ 50% higher Density than conventional Products
- ▀ Cable Relief on the Rear

Features Power Supplies:

- ▀ 200 W @ 45 °C
- ▀ 1+1 redundant Configuration
- ▀ Local LED Monitoring

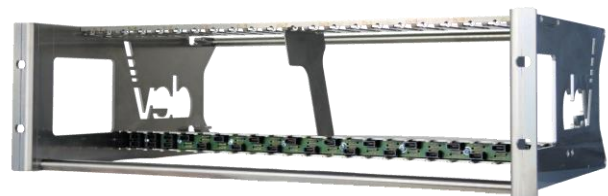

Technical Data DEV 3480 & DEV 3481

General Specification	Value	Condition
Size	19" (483 mm) Width, 5 RU (222 mm) Height, 11.8" (300 mm) Depth	
Weight	~3.3 kg	
Number of 5 RU Slots	22	
Number of 2.5 RU Slots	44	

Technical Data DEV 3483

General Specification	Value	Condition
Size	19" (483 mm) Width, 3 RU (133 mm) Height, 11.8" (300 mm) Depth	
Weight	~2.8 kg	
Number of 2.5 RU Slots	22	

Technical Data DEV 3490

General Specification	Value	Condition
Supply Voltage	100...240 V AC	
Output Voltage	24 VDC	
Output Power	200 W	
Size	2.36" (60 mm) Width (3 slots), 2.5 RU (110 mm) Height, 9.65" (245 mm) Depth	
Weight	~2.4 kg	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing

Technical Data DEV 3491

General Specification	Value	Condition
Supply Voltage	-36...-72 VDC & +36...+72 VDC	
Output Voltage	24 VDC	
Output Power	200 W	
Size	2.36" (60 mm) Width (3 slots), 2.5 RU (110 mm) Height, 9.65" (245 mm) Depth	
Weight	~1.8 kg	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing

Order Information

Products	
DEV 3480	MODULO Active Frame; 5 RU
DEV 3481	MODULO Passive Frame; 5 RU
DEV 3483	MODULO Active Frame; 3 RU
DEV 3490	MODULO Power Supply; 100...240 V; 2.5 RU, 200 W
DEV 3491	MODULO Power Supply; -36...-72 VDC & +36...+72 VDC; 2.5 RU, 200 W

Contact

DEV Systemtechnik GmbH
Grüner Weg 4A
61169 Friedberg
GERMANY
Phone: +49 6031 6975 100
Fax: +49 6031 6975 114
info@dev-systemtechnik.com
www.dev-systemtechnik.com

Rev. 17-Jan-2018

Technical specifications are subject to change